



Program Software set manual

1. Open the CD and install the software, ready a USB flash disk to save the message

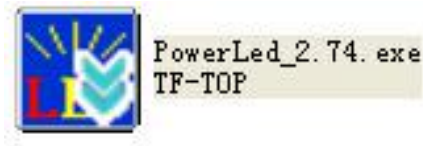


The software can auto update if have new version,
or click “Help →Check for Updates”


2. Open the software, you'll see below the program main window, click 选项-语言-English, to change the software window language to English,

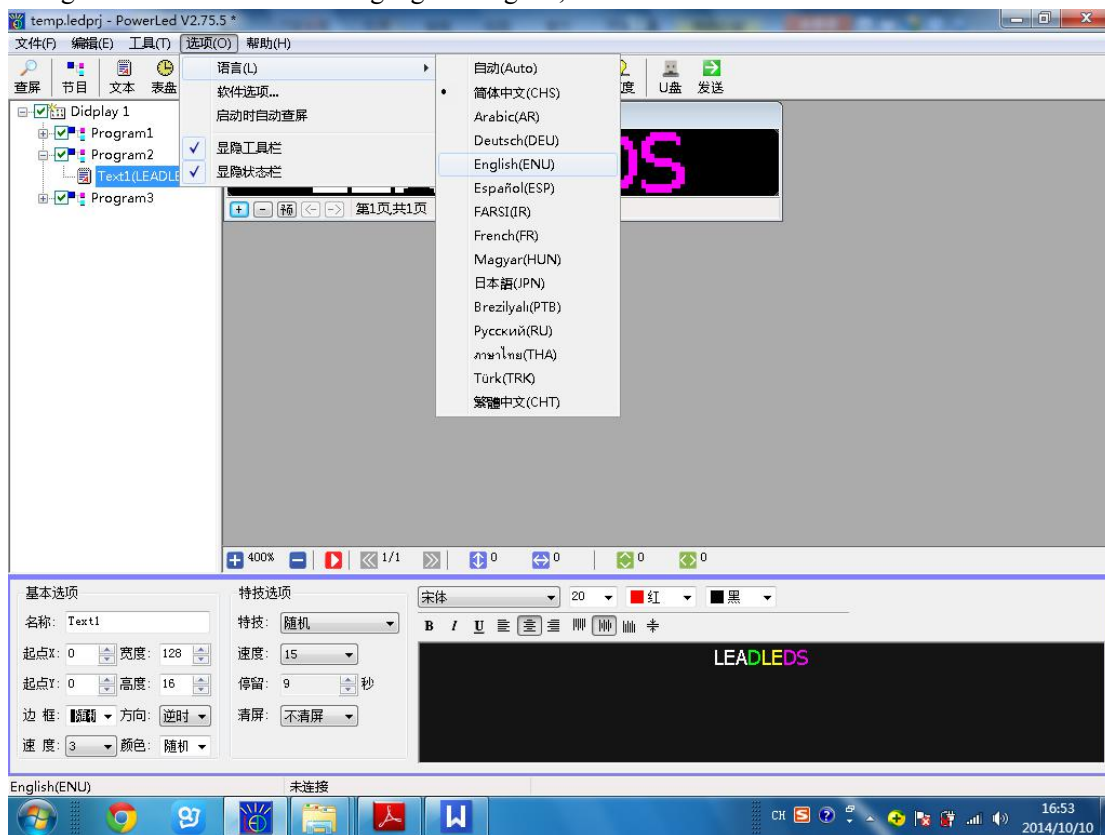

3. Click Tools - Panel Setup

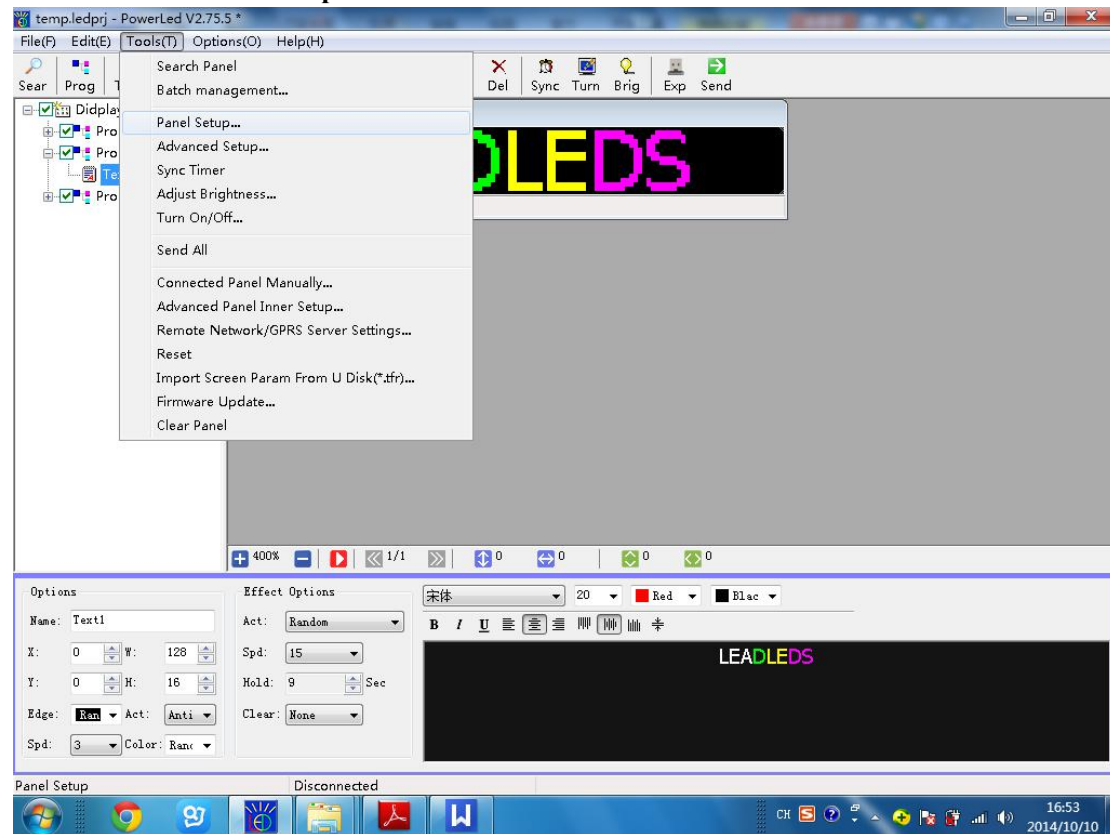

4. Enter password "168"

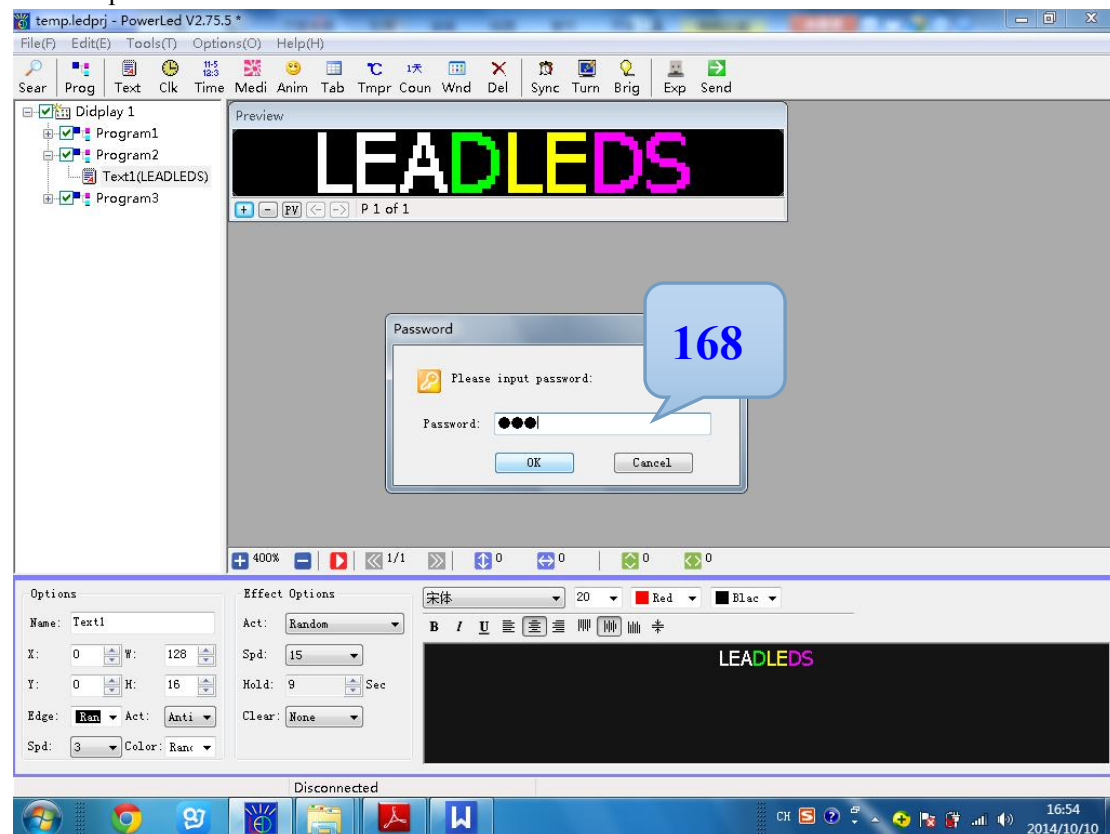

5. Set the led sign parameter same as below:

Controller: TF-S6UW

ColorType: R

W:128 **H:** 32


ScanType:

4.1 1/4 Every 8 pixels down fold 3 times (P10, Normal**)**


DataPolar: -

OE polar:+



6. Click **Setup-** 确定-Close

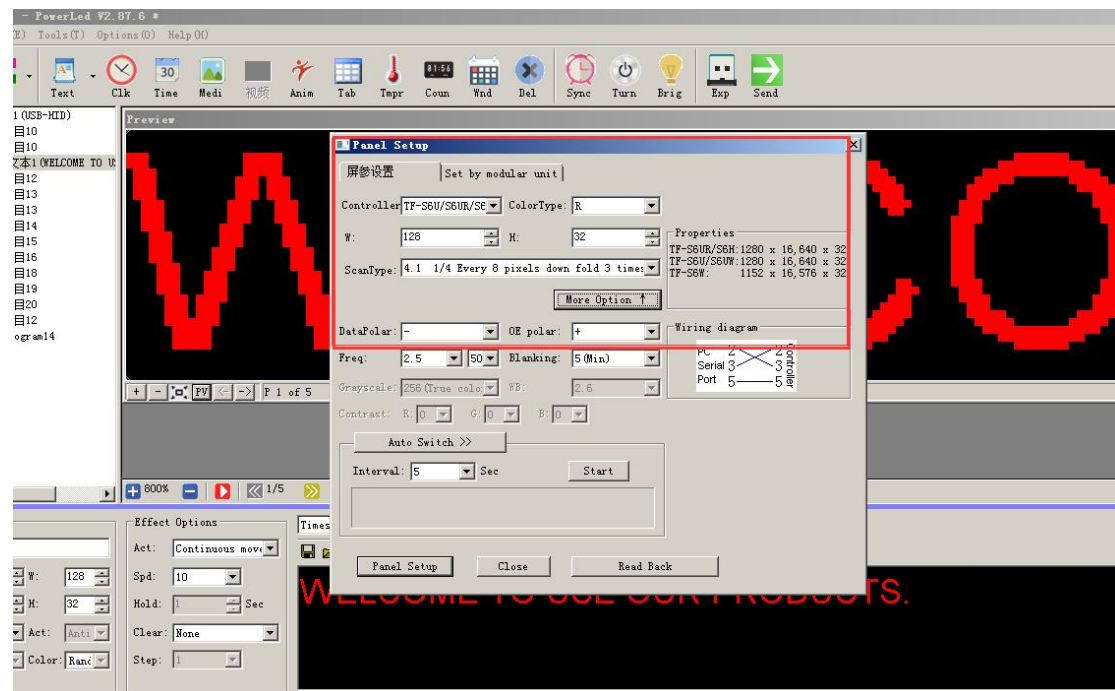


7. Click **Prog** to add a program, click **Text** to add a Text in this program, you also can click the icons in the tool bar.

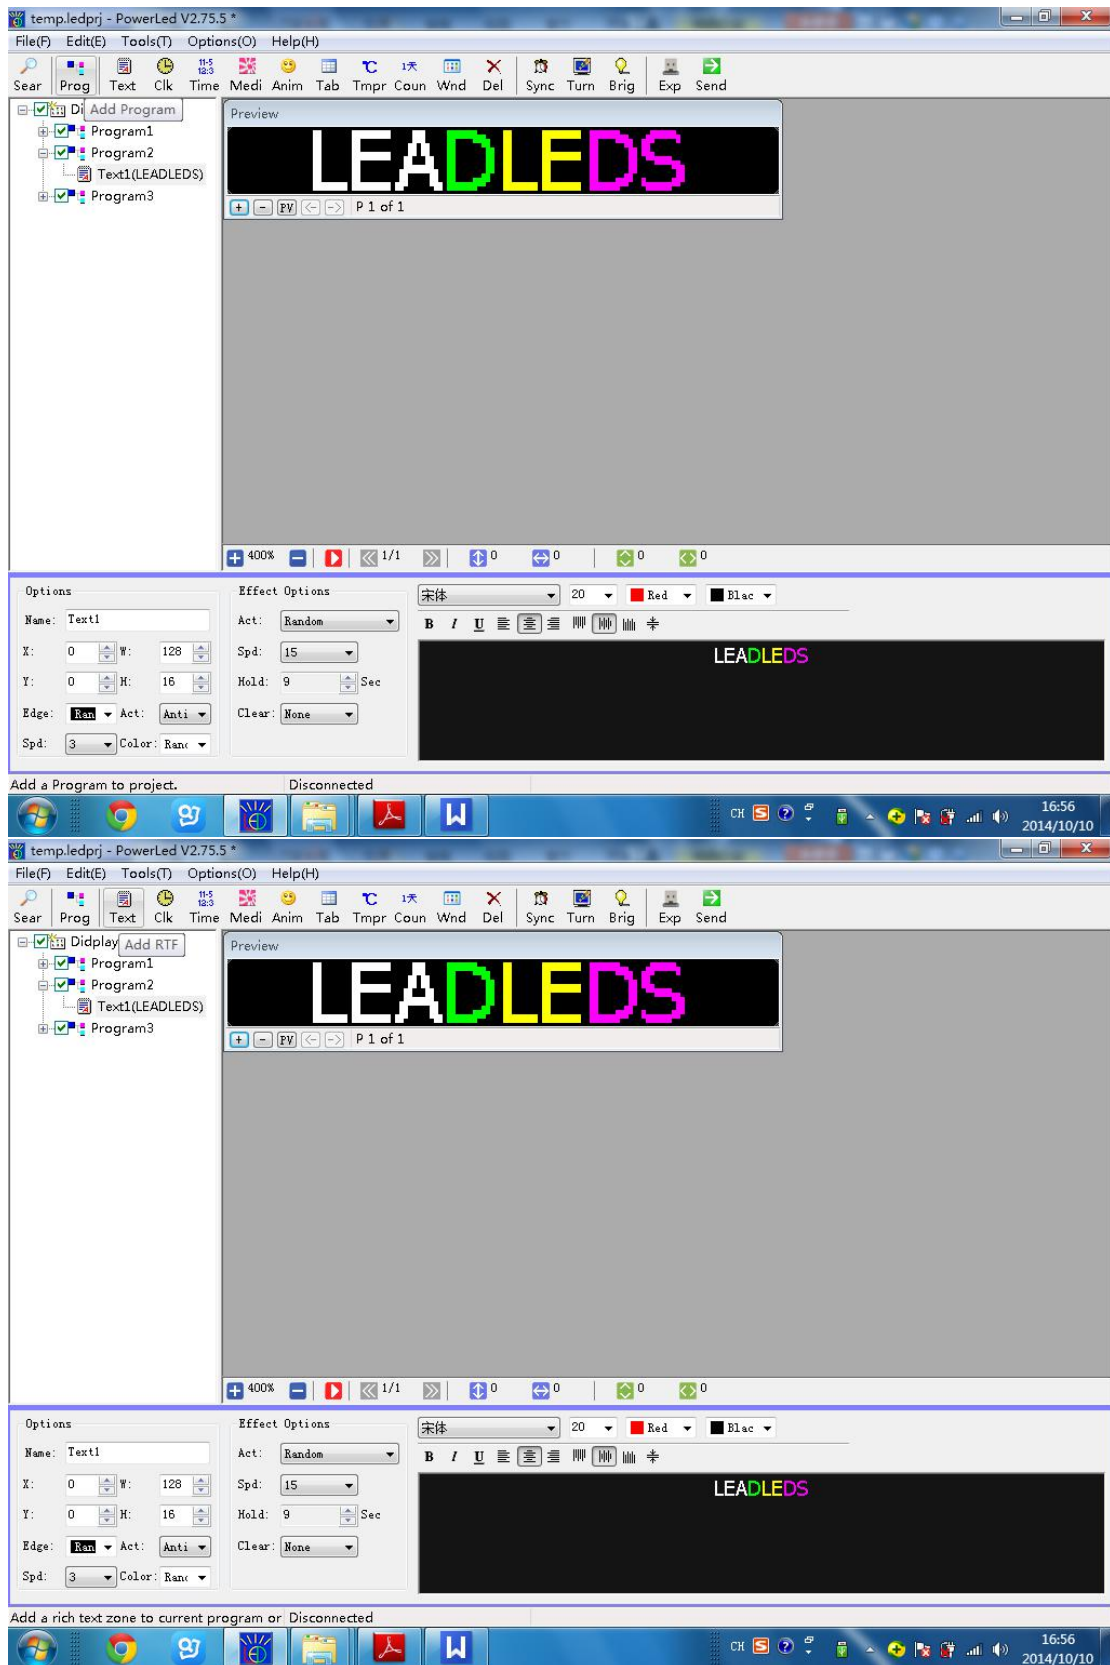


8. You can edit the message in this page

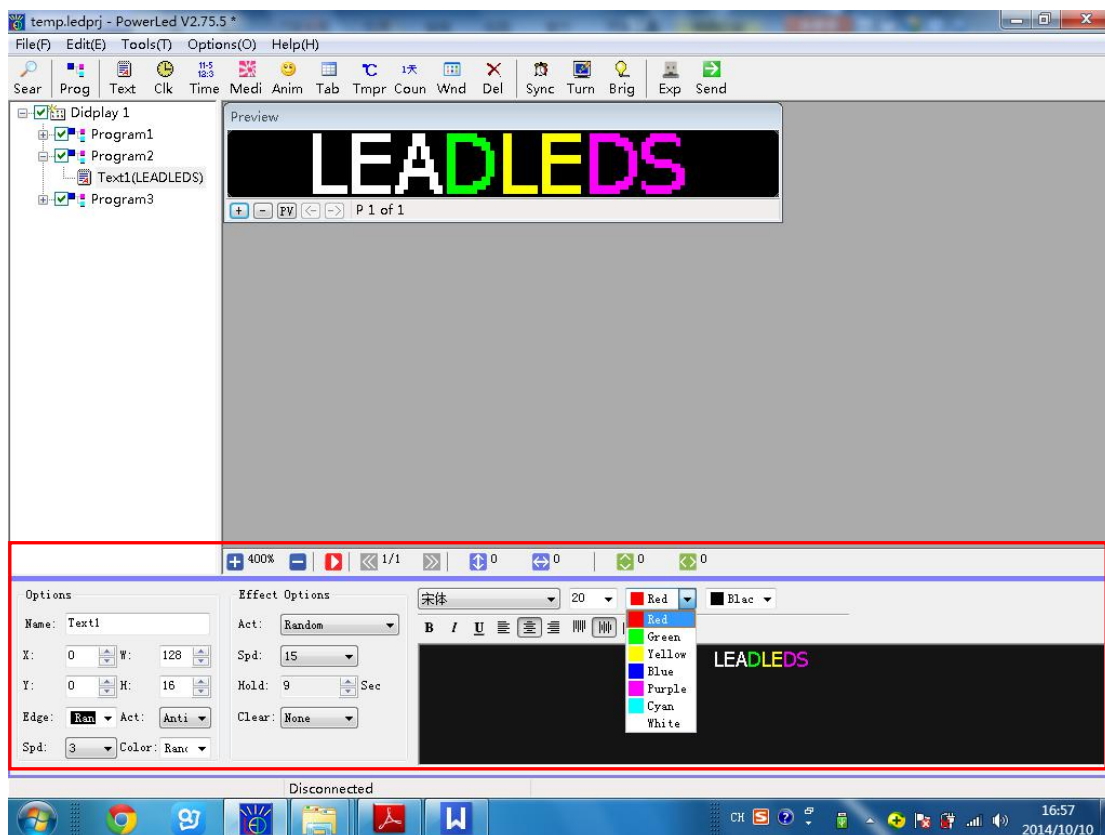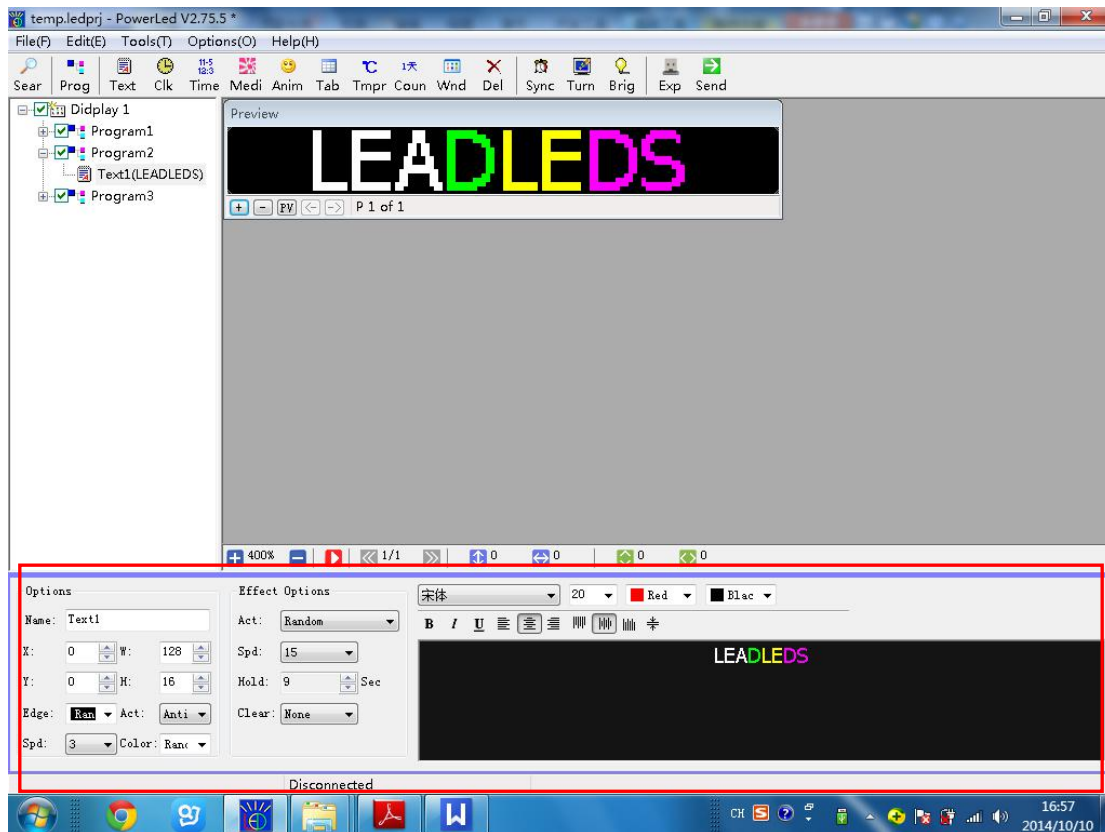


9. After finished program, click **Exp**, save the message in your USB flash disk.

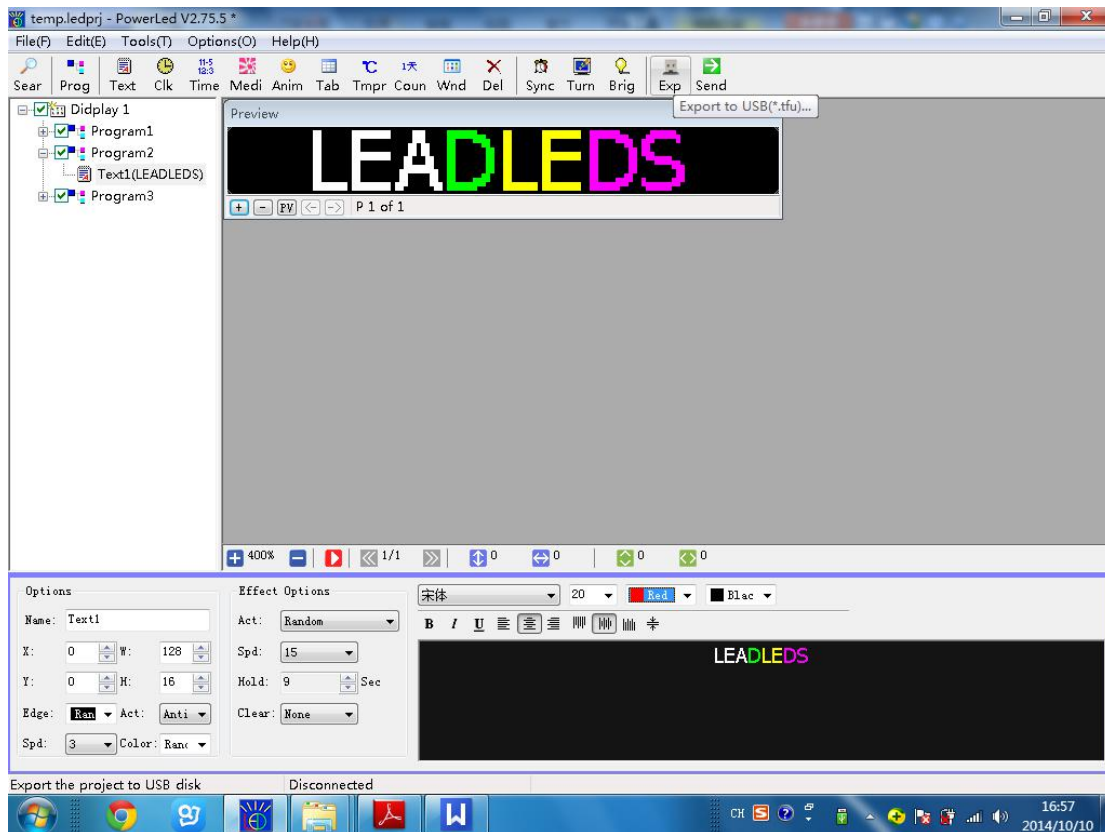

10. Choose the **Include panel parameters**, enter the password **168**, click ok.

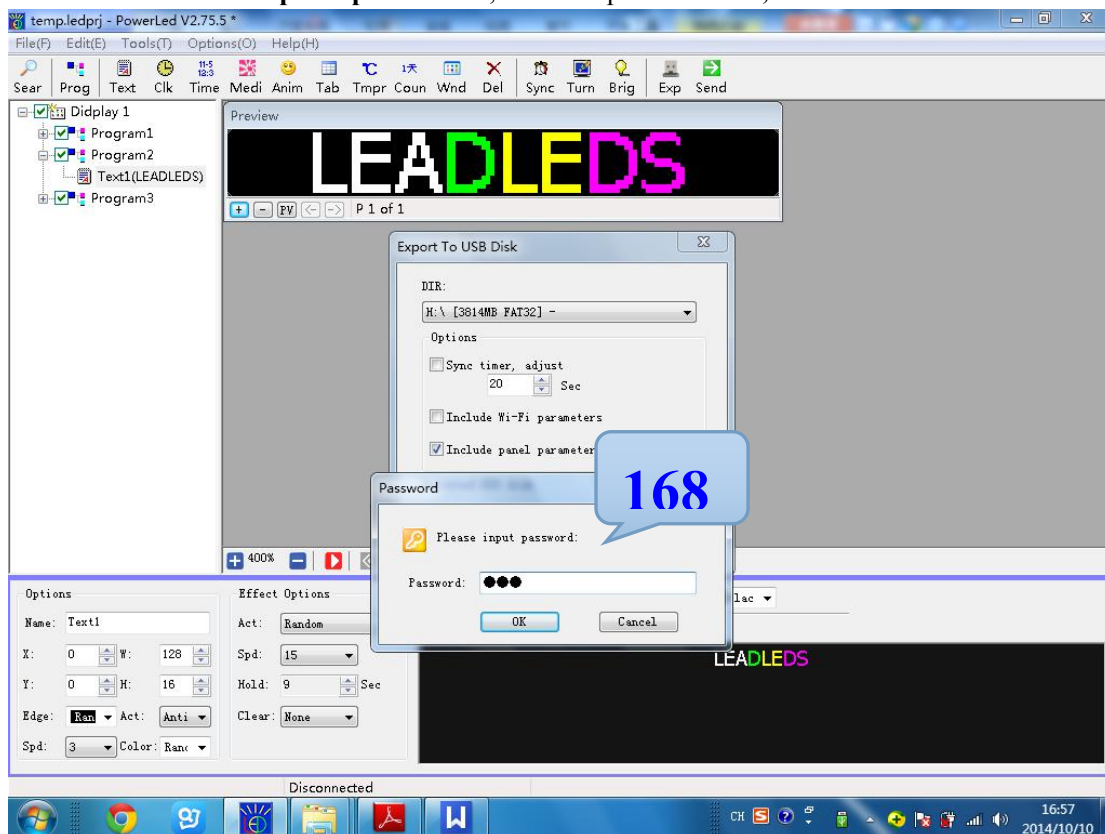

11. Click **Save- Close**.

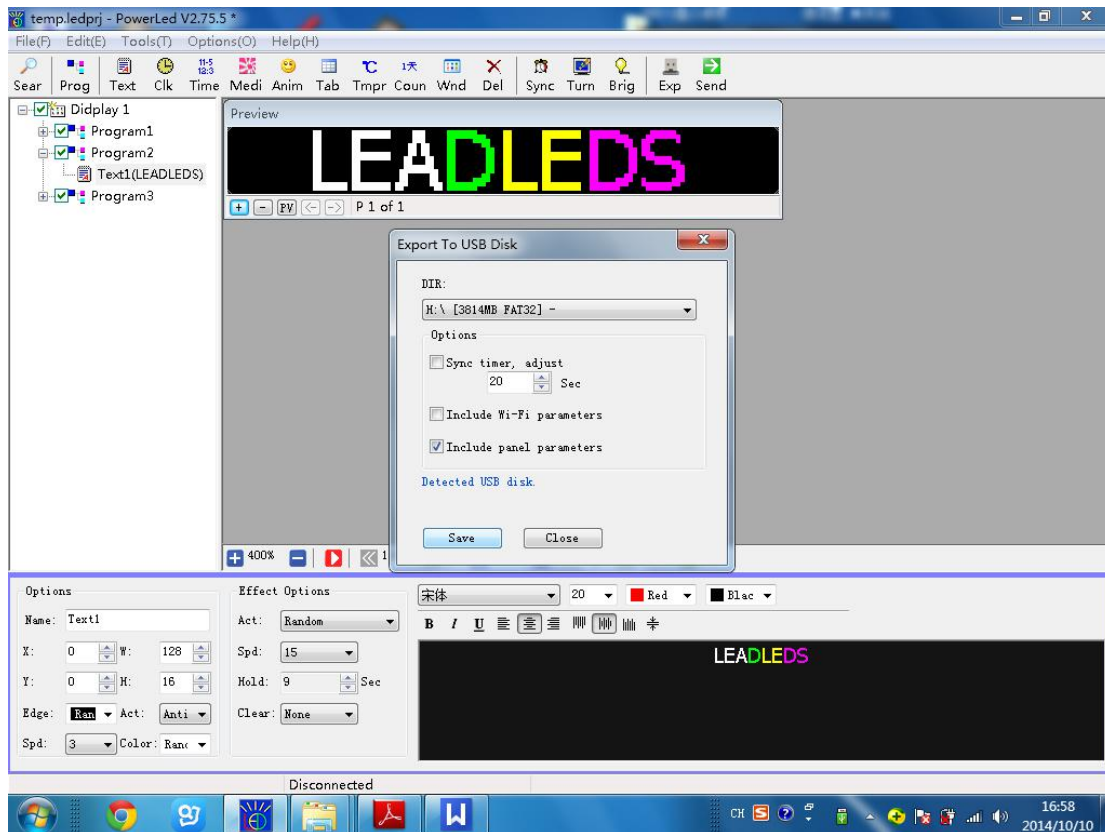

12. Pull out your USB flash disk from your PC to the led sign USB port, the led sign will read the message automatically, after you see the screen show “OK!”, then you pull out your USB flash disk from the LED sign, you’ll see the message just you programmed, IT ON THE SCREEN.

Dear, if you have any questions, please contact me E-mail:
jingzhi5686@leadleds.com

-----Thank you for use our products-----