


By U-disk Program Message Manual


Package Included: 1x Led Sign With Metal Hooks, 1x AC Plug, 1x CD with Software and Manual

1. Open the CD on your computer and install the software, ready a U-disk and insert the U-disk to your computer USB port for saving message.

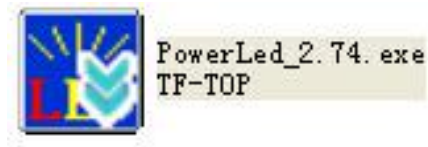


The software can auto update if have new version,
or click “Help → Check for Updates”


2. Open the software, you'll see below the program main window, click [选项-语言-English](#), to change the software window language to English.

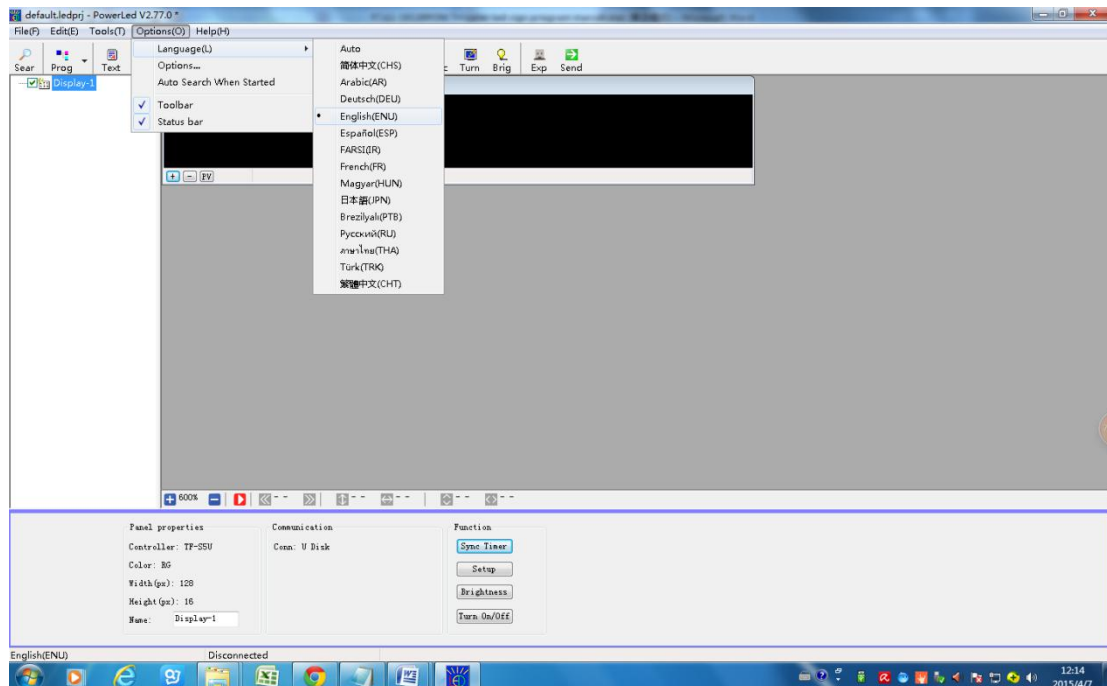

3. Click **Tools - Panel Setup**

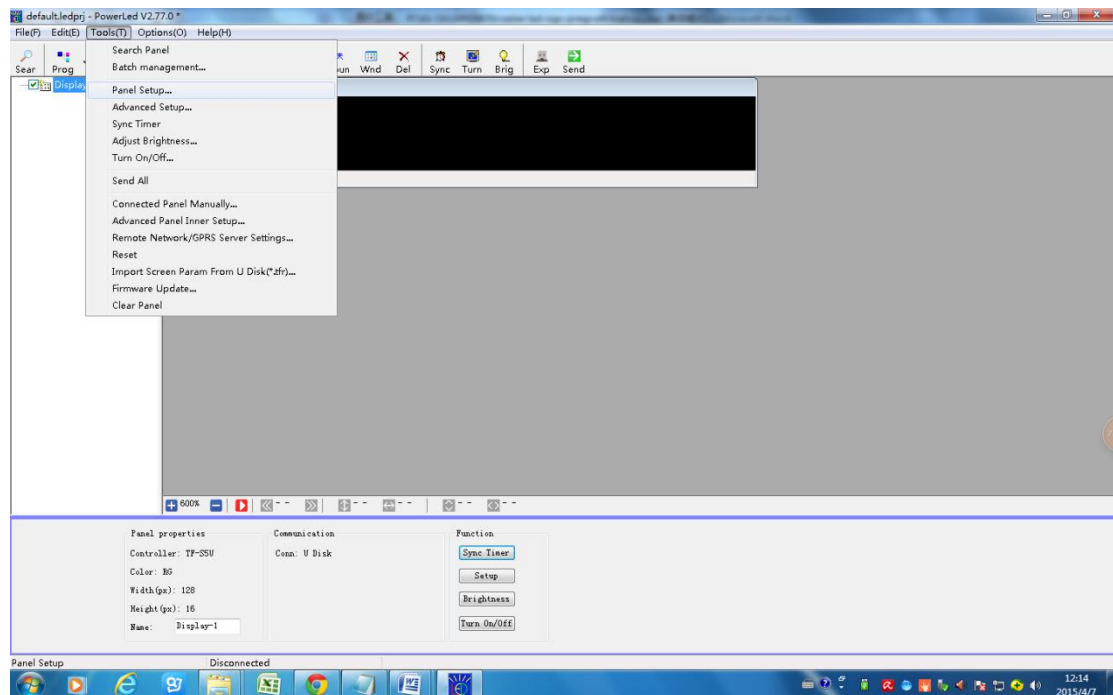

4. Enter password “168”

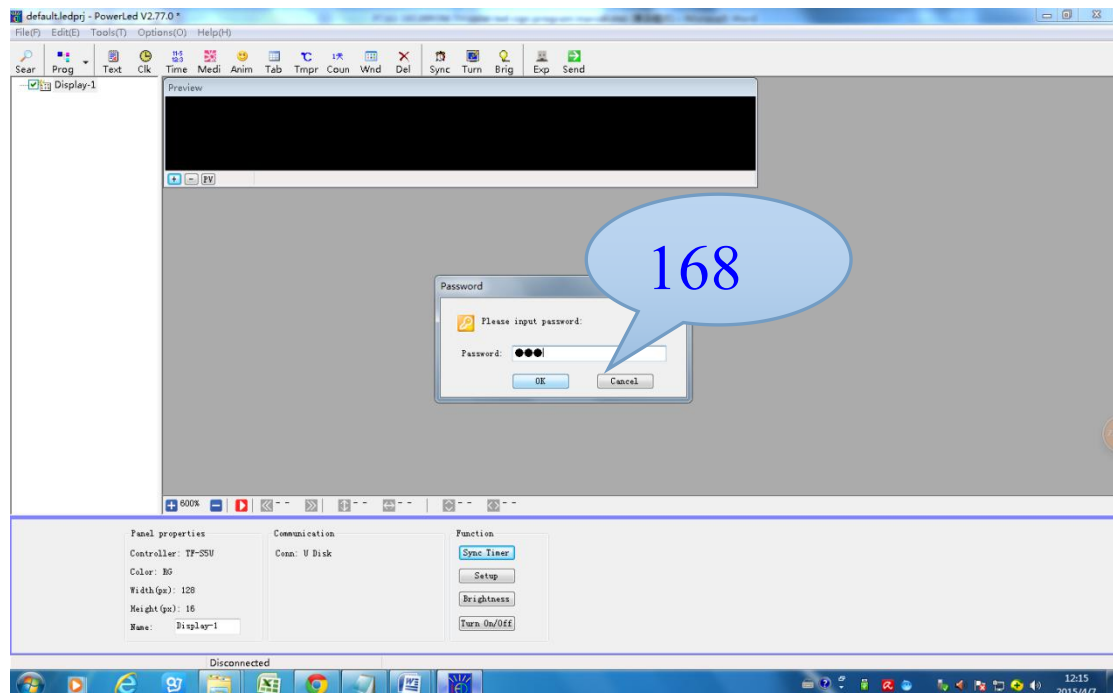

5. Set the led sign ColorType, Width and Height like below:

Controller: TF-S6UW

ColorType: R

W: 96 H: 32


ScanType:




4.1 1/4 Every 8 pixels down fold 3 times (**P10, Normal**)

DataPolar: -

OE polar: +

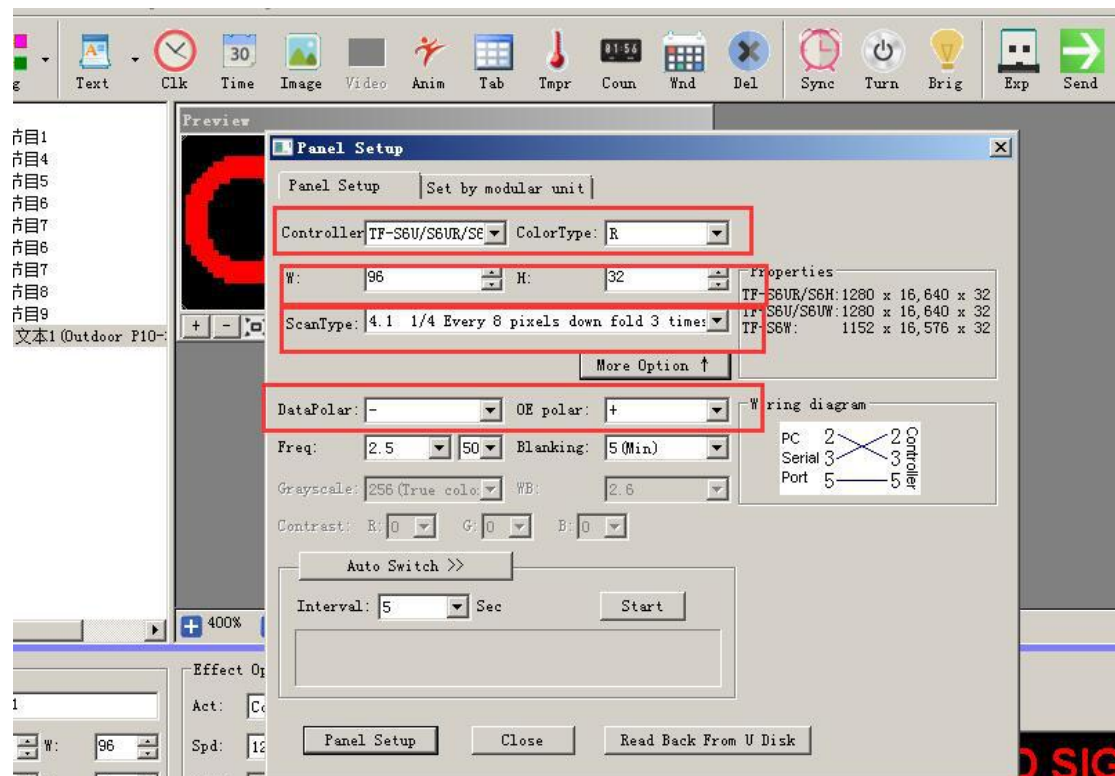



6. After finished parameter set, click “Setup”- “确定” -“Close”:

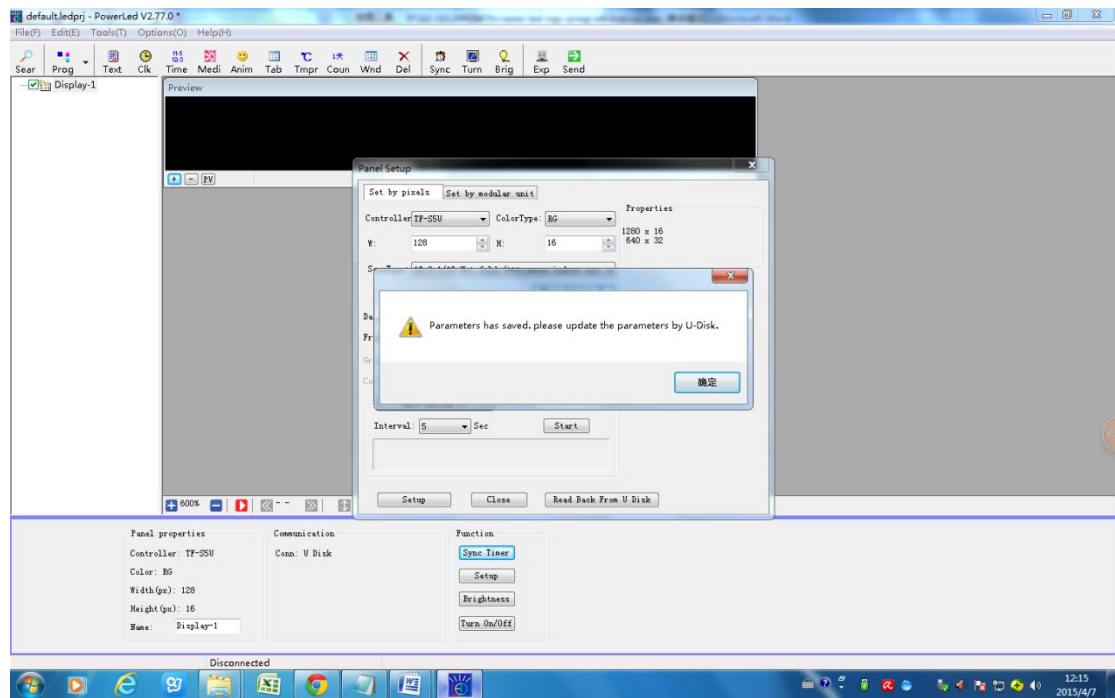


7. Now program your message:

Click **Prog**, then click **Text** to add Text in this program, you also can click the icon on the tool bar, include Time, Clk, Anim and etc to add the message according to you need.

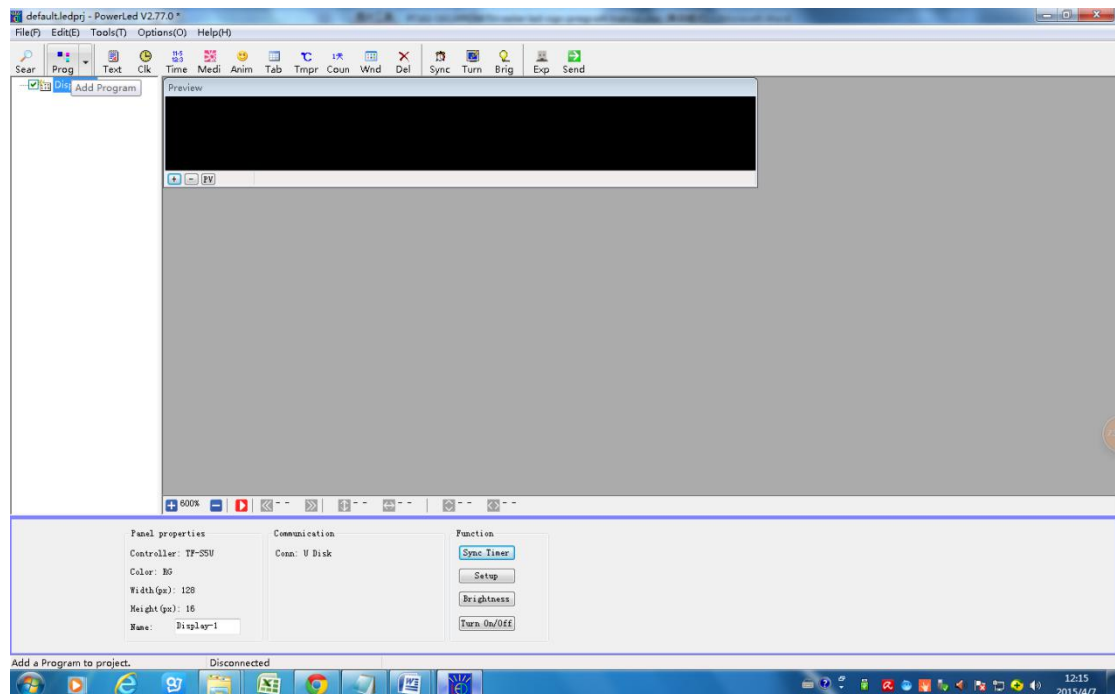


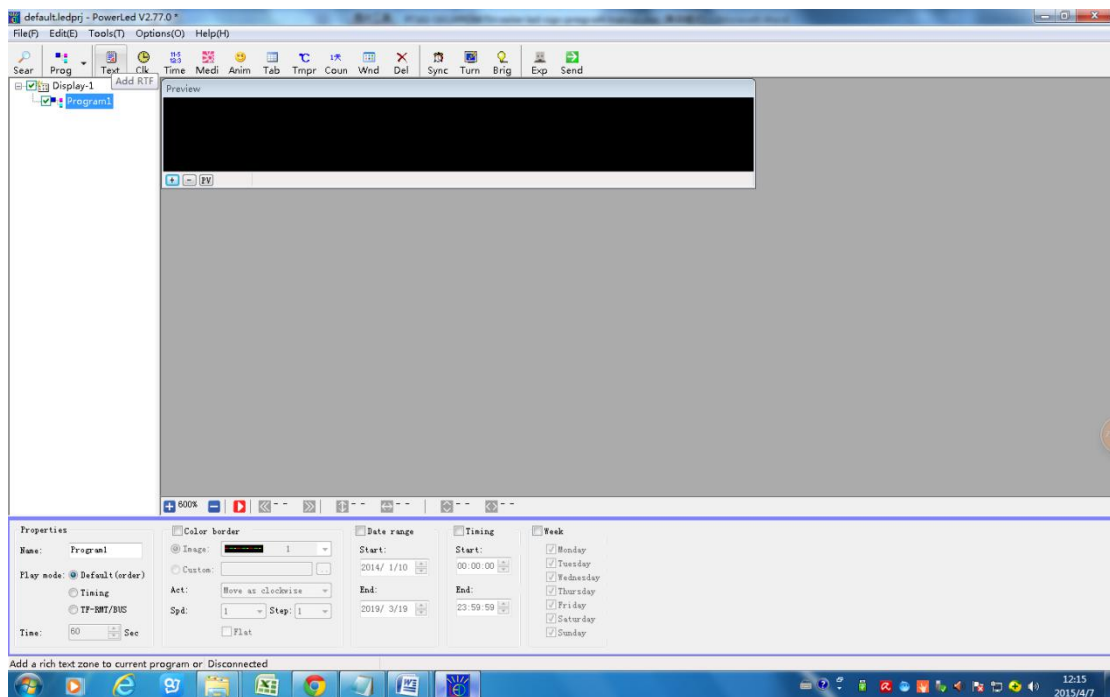

8. You can edit the message effect in this page, select different Font, Size, Act, Spd, Edge, Background color and etc

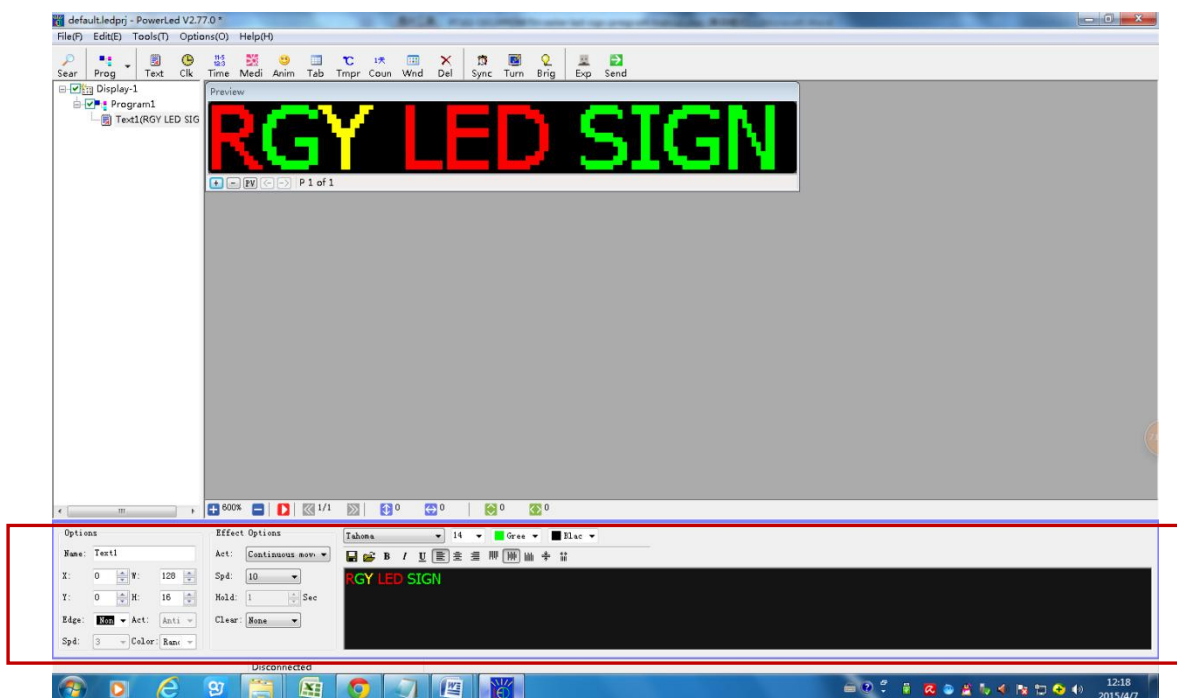



9. Click **PV** to start preview the message effect.

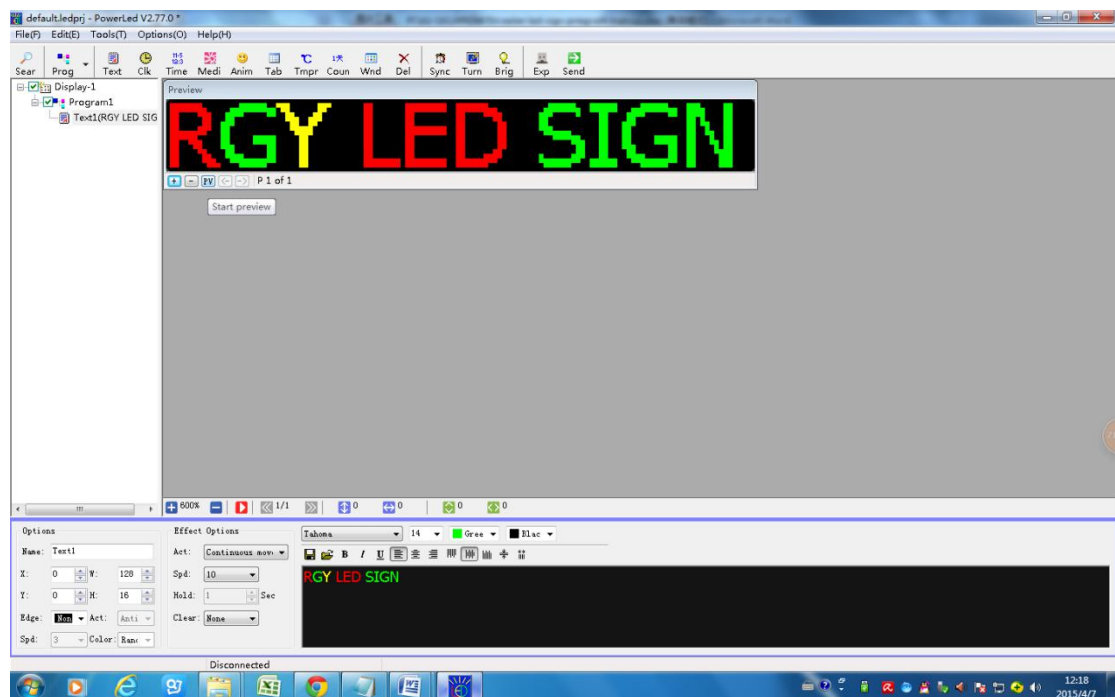

10. It can store up to 200 messages, so if you want to add more messages, please Click '**Prog**' to start programming next message.


Click '**Prog**', then Click '**Time**' or the icons on the tool bar.

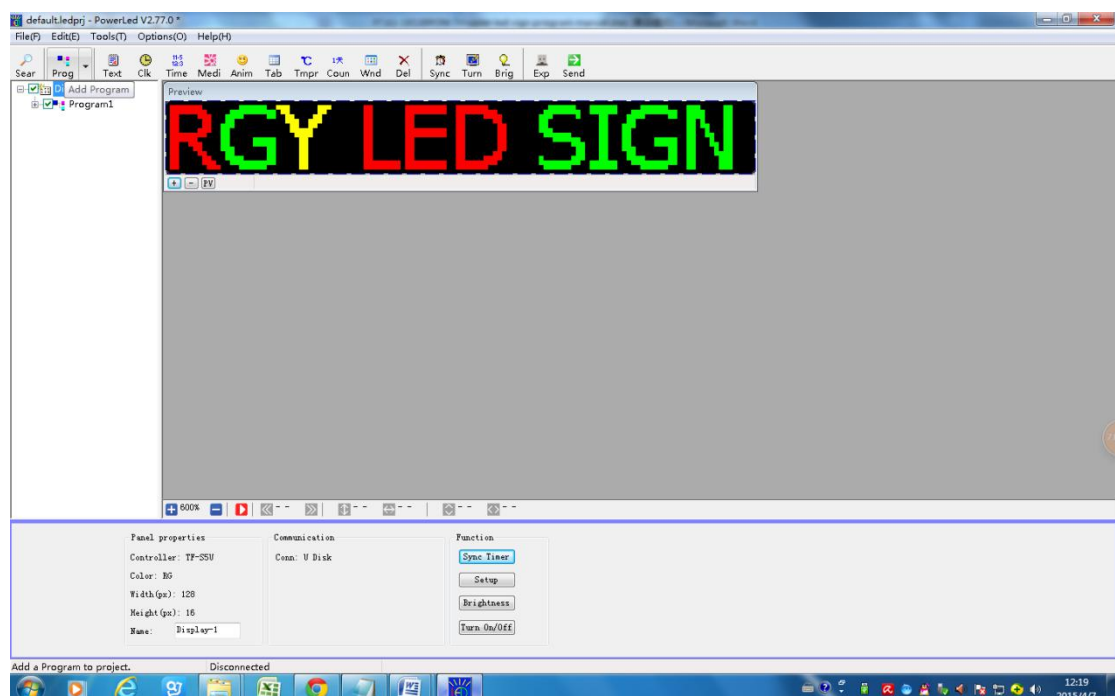

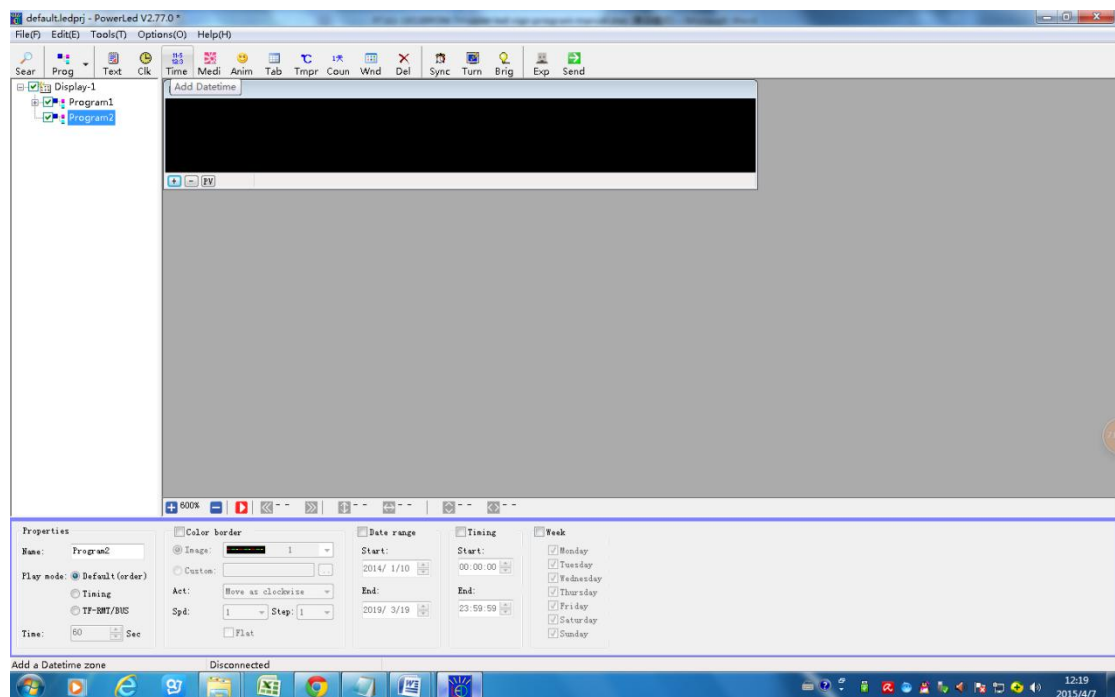


You can edit the Message here:

Tick Single line, select Time format, color and etc

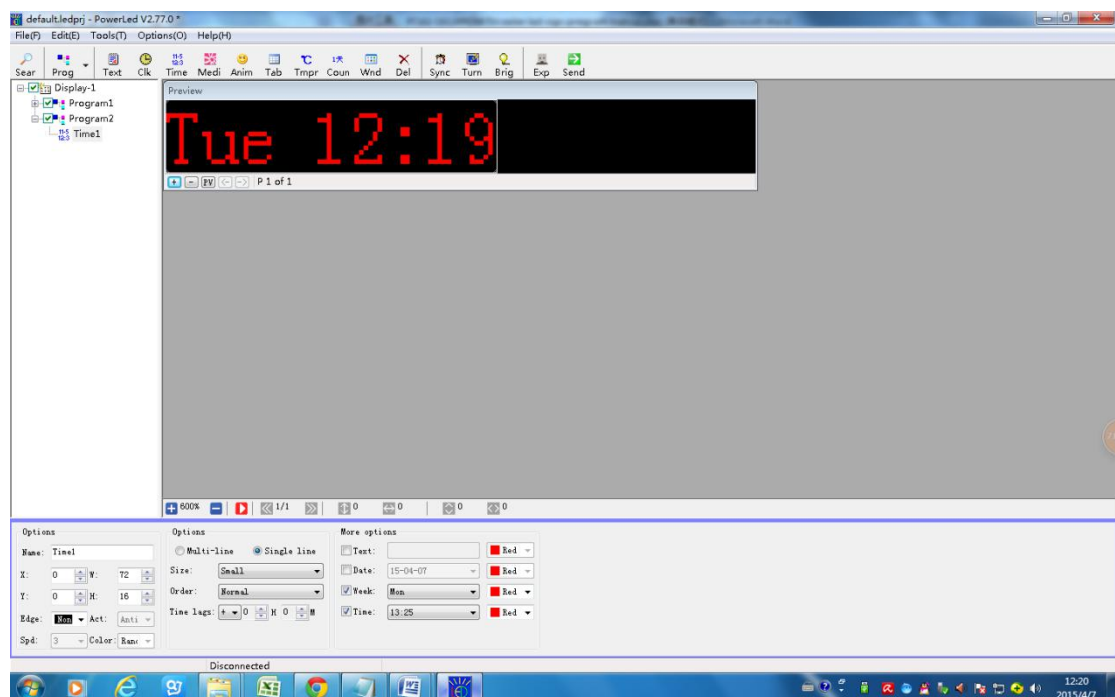


11. If you want add more messages in 1 program, just make sure each message don't cover each other, you can use your mouse to move the zones.


Click **Anim** or **other icons** to add the 2nd message for the Program 2.

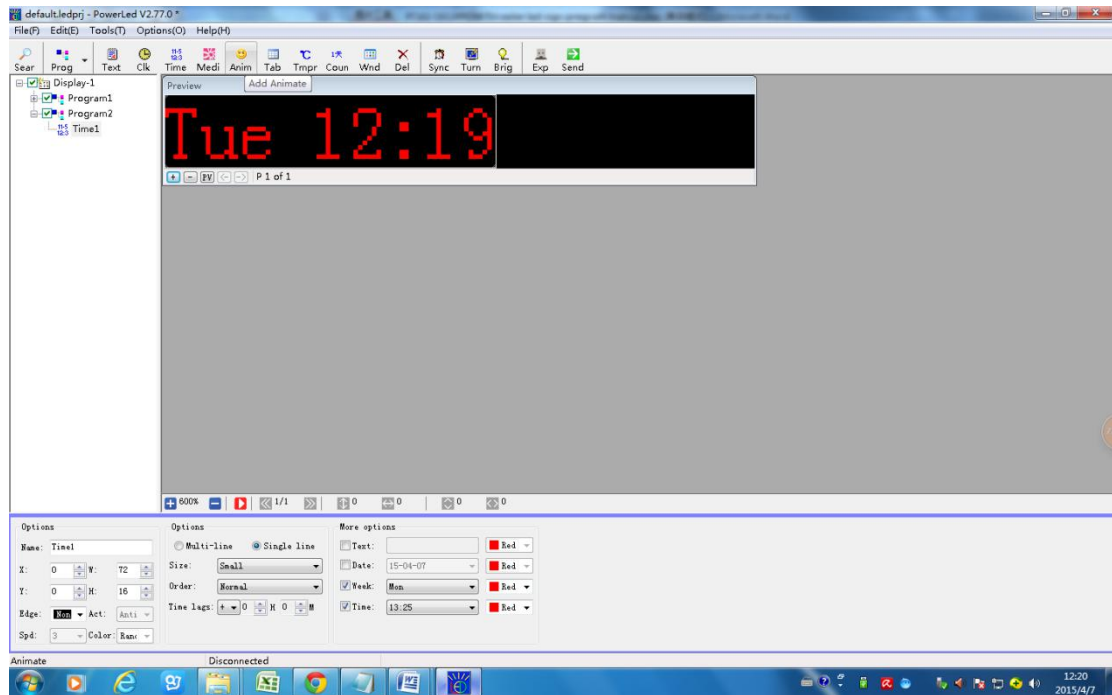

Edit the effect here (**Anim** only support single color, you can set it by Red or Green or Yellow):

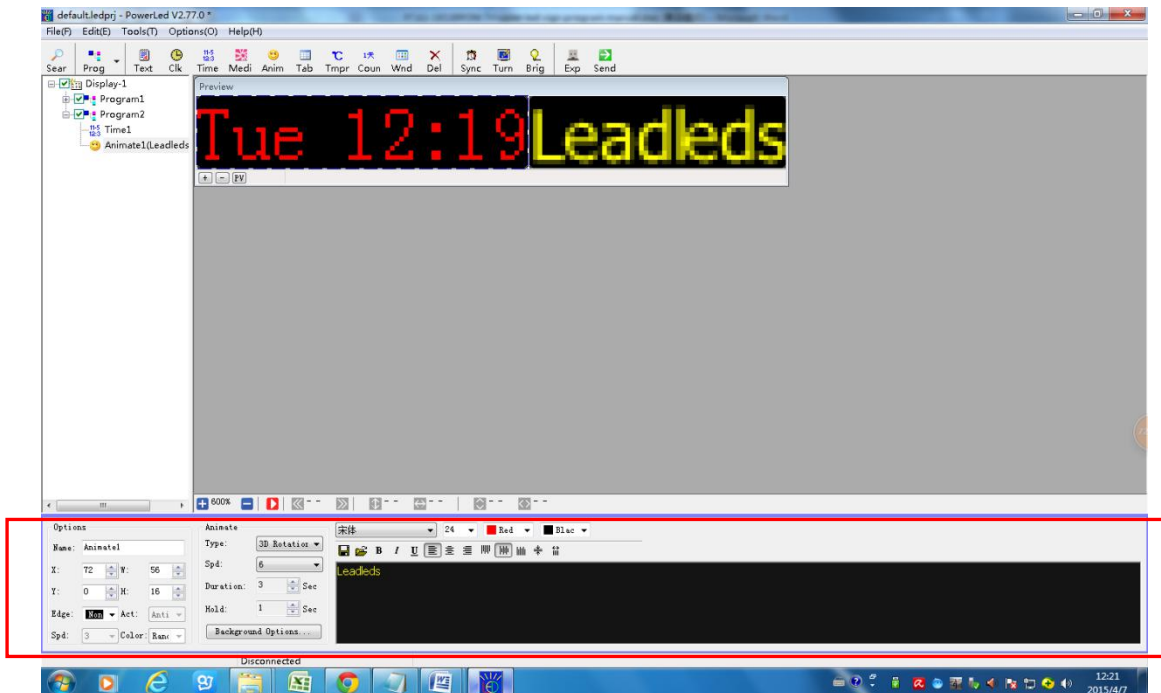


12. Click 'PV' to start preview the message effect.

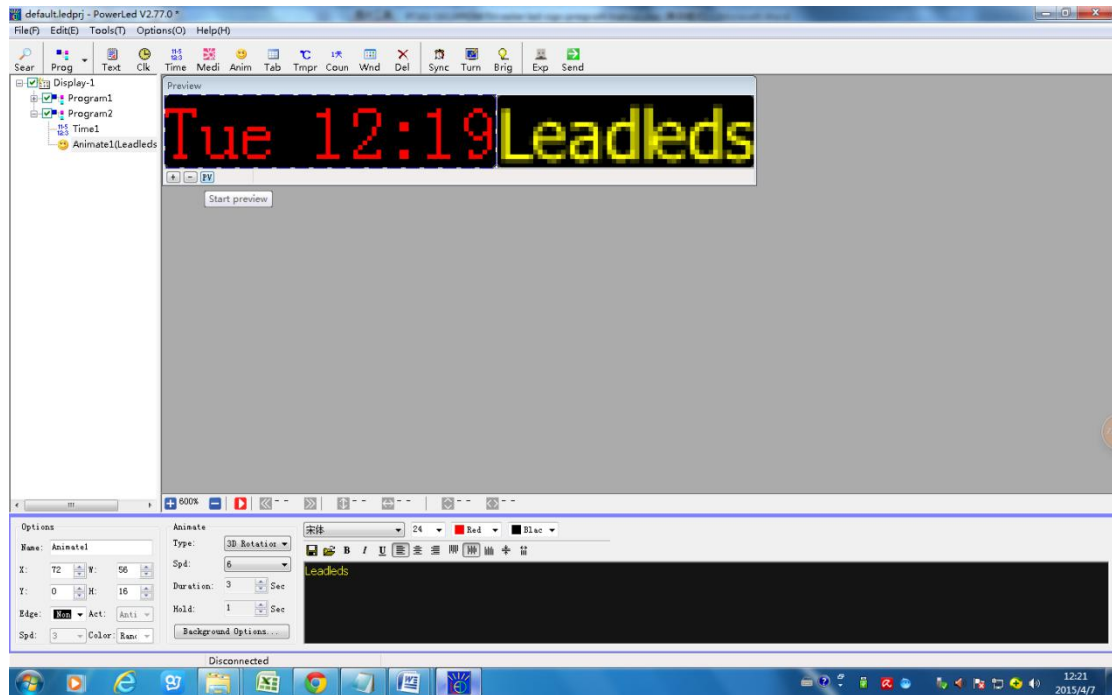

Note:


1. The led sign is available automatically ON or OFF, if you set Timing, it'll work on this period, after this time, it's going to sleep mode, awake it need you re program and re set the timer.

We don't suggest you tick Timing, just set like below:

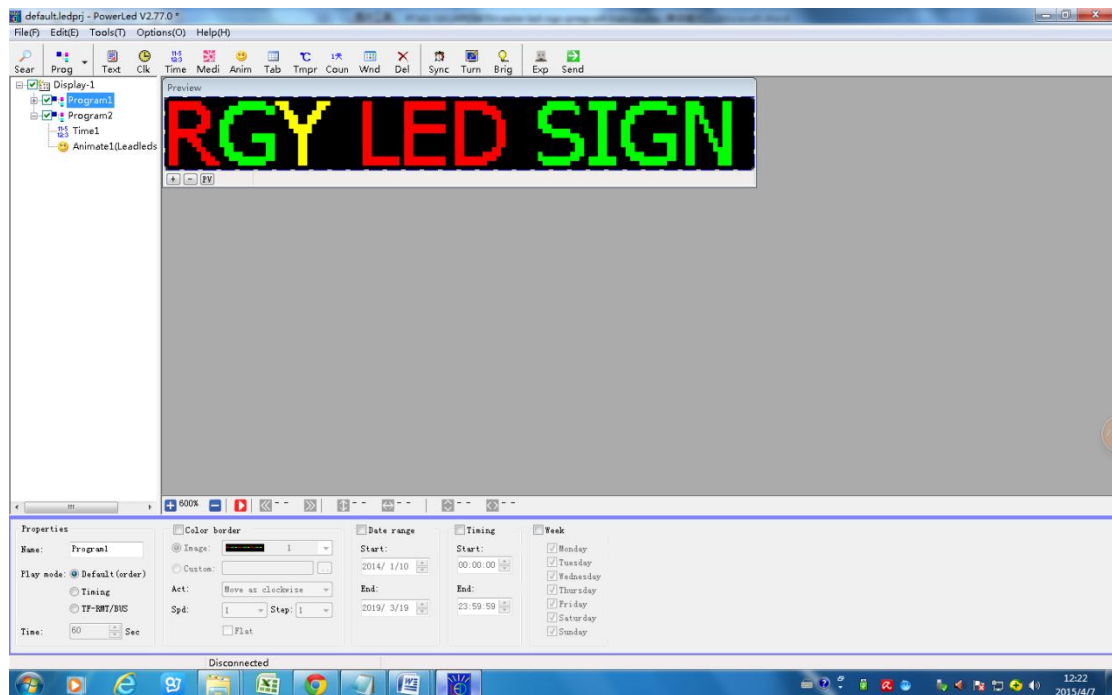


13. Tick the message what you need.

After finished program, click **Exp**, save the message to your U- disk.

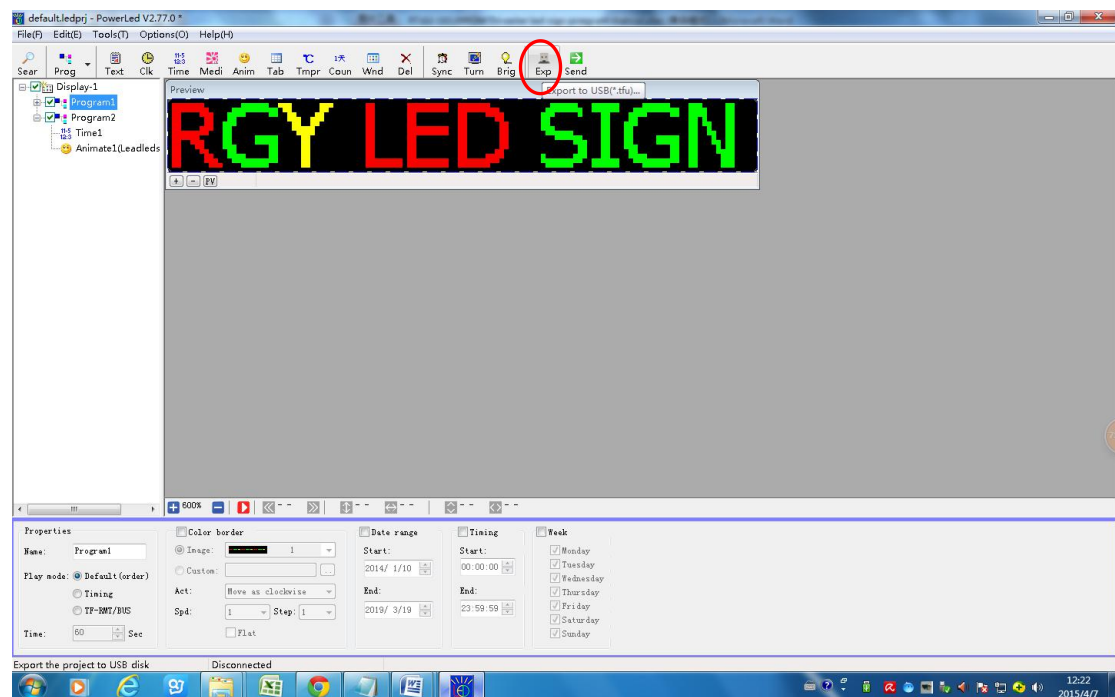

14. Choose your USB disk, click '**Save- Close.**' **Don't tick "Include panel parameters"**, If you want to synchronize the time same as your computer, tick **Sync timer**.

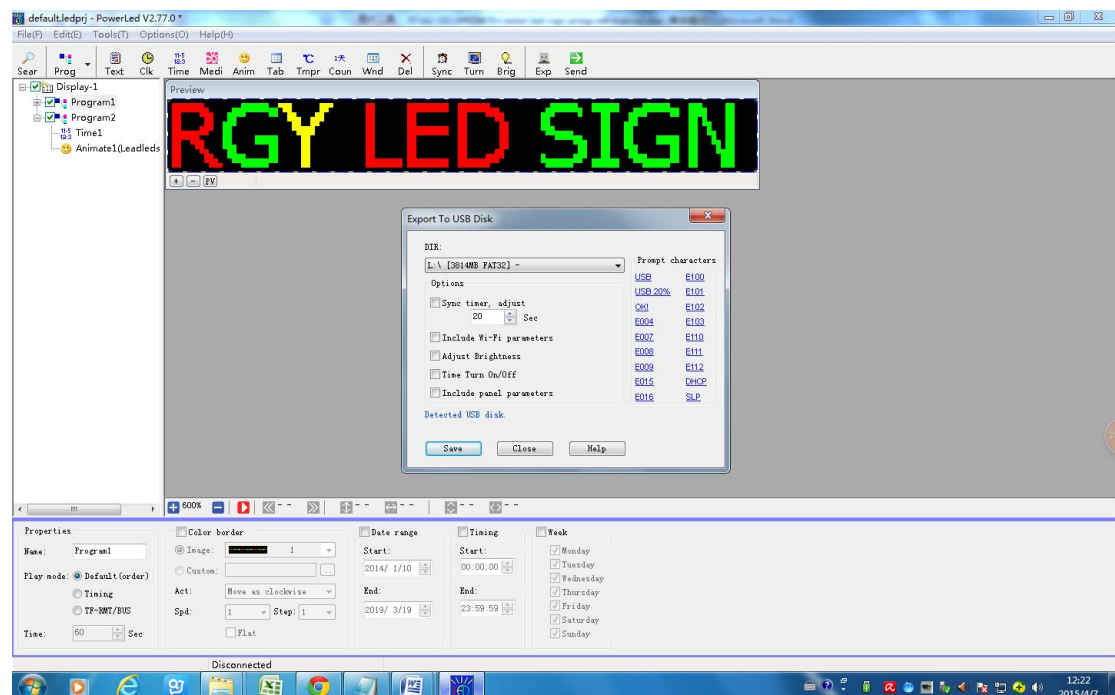

15. Move your U-disk from your computer and insert it to the led sign USB port, the led sign will

read the message automatically, after you see the screen show “**OK!**”, then you pull out your U-disk from the LED sign.

SEE WHAT ON THE SCREEN , THAT’S JUST YOU PROGRAMMED MESSAGE.

Appendix:

- ◆ When program your message, you just need to set ‘ColorType, W and H’, do according to above steps, the led sign will adapt automatically.

1. The led sign actual technical parameter, click “**Tools – Panel Setup**”, Password “168”.

Controller: TF-S6UW

ColorType: R

W: 96 H: 32

ScanType:

4.1 1/4 Every 8 pixels down fold 3 times (**P10,
Normal**)


DataPolar: -

OE polar: +

FAQ:

1. What’s meaning E100?
It’s meaning no program saved in your U-disk, please re save it or use a new U-disk to save message.
2. Why my led sign is off automatically?

4. The user friendly software list all Error with solution, you will see when Click 'Exp', click Prompt characters.

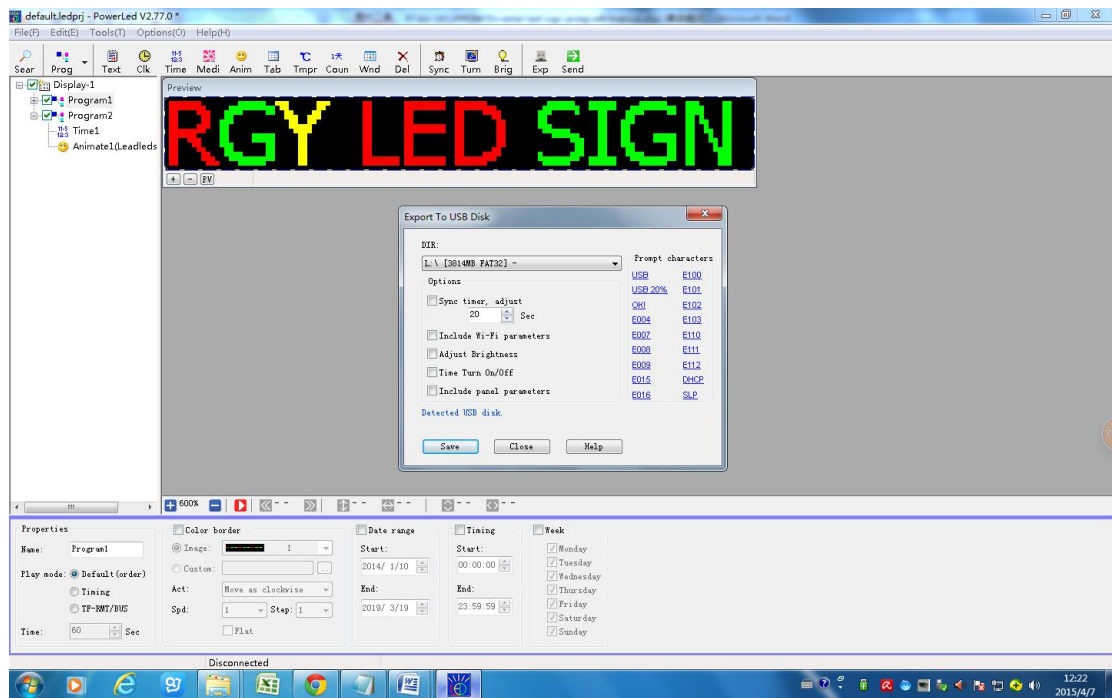

If have any technical question, please send your question to: jingzhi5685@leadleds.com